


REBAR J HOOKS



Rebar J Hooks are used to keep the Load Support Grid (LSG series) pinned down in the following applications:

- Grassy paving
- Loose gravel paving
- Beach access (sand paving)



Rebar J Hook

*Rebar J hooks should not be used if you are installing Gravel-Lok, brick pavers, concrete or asphalt over the Load Support Grid.


Choosing the right Rebar J Hook – Use a Rebar J Hook which is at least 4 times the cell depth of the Load Support Grid

Cell Depth of LSG	Correct Size Rebar J Hook	Product Code Number
3"	18"	JHR18
4"	18"	JHR18
6"	24"	JHR24

Placement of Rebar J Hooks

The goal is to place Rebar J Hooks every 3' - 4' in all directions. And, be sure to place one every 3' around the perimeter. Suggested placement for each grid is shown below.

LSG-3 and LSG-4 and LSG-6 (9' x 24')

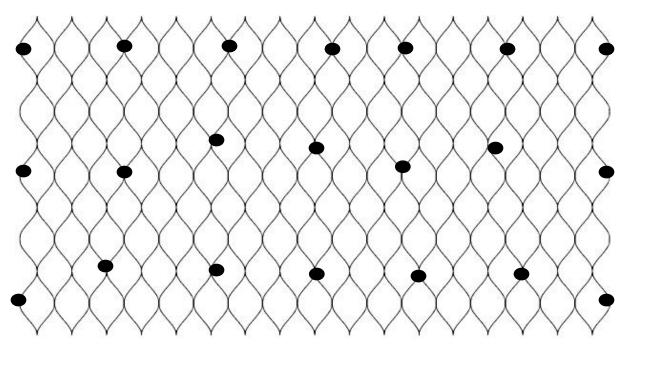





Providing Architects and Builders with Superior Paving, Decking and Pedestal Products.

Commercial | Luxury Residential | Municipal

Extended Team

We can also provide technical consultation and installation training for projects that involve Buzon Pedestals. Please contact us to discuss your particular needs. HDG Building Materials also has a network of experienced installers in many major cities. Please contact us for introductions or referrals.

Sales Representatives

Sales representatives for HDG Building Materials are located in the Pacific Northwest, Southern California, and Iowa.


Outside of those regions? No problem, we are happy to serve. Please contact us at 503.360.9551



CELL-TEK

HDG Building Materials is an authorized dealer for Cell-Tek and Gravel-Lok products.HDG provides architectural sales and support in North America HDG Building Materials Commercial | Luxury Residential | Municipal

> 5317 NW Goodwin Loop Camas, WA 98607



sales@hdgbuildingmaterials.com